
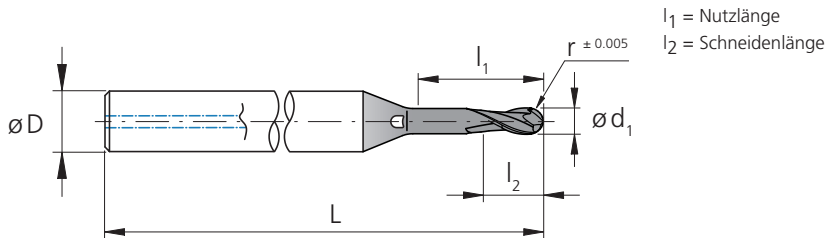


CrazyMill Cool Vollradius - Typ C - 5 x d



P	N	S ₃
M	S ₁	H ₁
K	S ₂	H ₂

ANWENDUNGSEMPFEHLUNG

- Sehr gut geeignet
- ◐ Gut geeignet
- bedingt geeignet
- ⊗ Nicht empfohlen

■ ab Lager	Artikelnummer	d_1 -/+ 0.01 [mm]	r [mm]	l_1 [mm]	l_2 [mm]	D (h6) [mm]	L [mm]	Z [Zähne]
■	2.CMC30.C5Z2.030.1	0.30	0.15	1.5	0.6	3	38	2
■	2.CMC30.C5Z2.040.1	0.40	0.20	2.0	0.8	3	38	2
■	2.CMC30.C5Z2.050.1	0.50	0.25	2.5	1.0	3	38	2
■	2.CMC30.C5Z2.060.1	0.60	0.30	3.0	1.2	3	38	2
■	2.CMC30.C5Z2.080.1	0.80	0.40	4.0	1.6	3	38	2
■	2.CMC30.C5Z2.100.1	1.00	0.50	5.0	2.0	4	40	2
■	2.CMC30.C5Z2.120.1	1.20	0.60	6.0	2.4	4	40	2
■	2.CMC30.C5Z2.150.1	1.50	0.75	7.5	3.0	4	40	2
■	2.CMC30.C5Z2.180.1	1.80	0.90	9.0	3.6	4	44	2
■	2.CMC30.C5Z2.200.1	2.00	1.00	10.0	4.0	4	44	2
■	2.CMC30.C5Z2.250.1	2.50	1.25	12.5	5.0	6	50	2
■	2.CMC30.C5Z2.300.1	3.00	1.50	15.0	6.0	6	55	2
■	2.CMC30.C5Z2.400.1	4.00	2.00	20.0	8.0	6	60	2
■	2.CMC30.C5Z2.600.1	6.00	3.00	30.0	12.0	10	70	2
■	2.CMC30.C5Z2.800.1	8.00	4.00	40.0	16.0	12	90	2

Toleranz Typ	Ø d ≤ 3 mm	3 mm < Ø d ≤ 6 mm
h6	-0.006 / +0	-0.008 / +0

Hauptsitz und Fabrikation
MIKRON TOOL SA AGNO
 Tel. +41 91 610 40 00
 Fax. +41 91 610 40 10
 mto@mikron.com

Fabrikation und Nachschleifservice
MIKRON GMBH ROTTWEIL
 Tel. +49 741 5380 450
 Fax. +49 741 5380 480
 info.mtr@mikron.com

Nord- und Südamerika Verkauf
MIKRON CORP. MONROE
 Tel. +1 203 261 3100
 Fax. +1 203 268 4752
 mmo@mikron.com

China Verkauf
MIKRON TOOL SHANGHAI
 Tel. +86 21 2076 5671
 Fax. +86 21 2076 5562