



CrazyMill Cool Ball - Type C - 5 x d

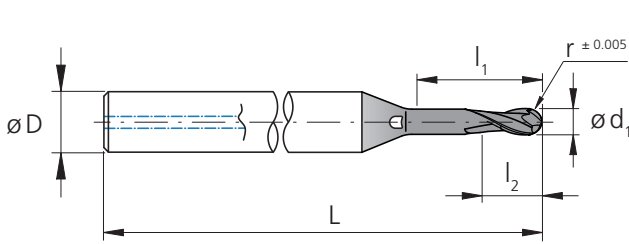

l_1 = Effective length
 l_2 = Cutting length



RECOMMENDATION FOR USE

- Excellent
- Good
- Acceptable
- ⊗ Not recommended

from stock	Item number	d_1 -/+0.01 [mm]	d_1 -/+ .0004" [inch]	r [mm]	l_1 [mm]	l_1 [inch]	l_2 [mm]	D (h6) [mm]	L [mm]	L [inch]	Z [teeth]
■	2.CMC30.C5Z2.030.1	0.3	.012	0.15	1.5	.059	0.6	3	38	1.50	2
■	2.CMC30.C5Z2.040.1	0.4	.016	0.20	2.0	.079	0.8	3	38	1.50	2
■	2.CMC30.C5Z2.050.1	0.5	.020	0.25	2.5	.098	1.0	3	38	1.50	2
■	2.CMC30.C5Z2.060.1	0.6	.024	0.30	3.0	.118	1.2	3	38	1.50	2
■	2.CMC30.C5Z2.080.1	0.8	.031	0.40	4.0	.157	1.6	3	38	1.50	2
■	2.CMC30.C5Z2.100.1	1.0	.039	0.50	5.0	.197	2.0	4	40	1.57	2
■	2.CMC30.C5Z2.120.1	1.2	.047	0.60	6.0	.236	2.4	4	40	1.57	2
■	2.CMC30.C5Z2.150.1	1.5	.059	0.75	7.5	.295	3.0	4	40	1.57	2
■	2.CMC30.C5Z2.180.1	1.8	.071	0.90	9.0	.354	3.6	4	44	1.73	2
■	2.CMC30.C5Z2.200.1	2.0	.079	1.00	10.0	.394	4.0	4	44	1.73	2
■	2.CMC30.C5Z2.250.1	2.5	.098	1.25	12.5	.492	5.0	6	50	1.97	2
■	2.CMC30.C5Z2.300.1	3.0	.118	1.50	15.0	.591	6.0	6	55	2.17	2
■	2.CMC30.C5Z2.400.1	4.0	.157	2.00	20.0	.787	8.0	6	60	2.36	2
■	2.CMC30.C5Z2.600.1	6.0	.236	3.00	30.0	1.18	12.0	10	70	2.76	2
■	2.CMC30.C5Z2.800.1	8.0	.315	4.00	40.0	1.58	16.0	12	90	3.54	2

Tolerance type	$\varnothing d \leq 3 \text{ mm } (.118")$		$3 \text{ mm } (.118") < \varnothing d \leq 6 \text{ mm } (.236")$	
h6	-0.006 / +0	-.00024 / +0	-0.008 / +0	-.00031 / +0

Headquarter and Production
MIKRON TOOL SA AGNO
Phone +41 91 610 40 00
Fax. +41 91 610 40 10
mto@mikron.com

Production and Regrinding
MIKRON GMBH ROTTWEIL
Phone +49 741 5380 450
Fax. +49 741 5380 480
info.mtr@mikron.com

North and South America Sales
MIKRON CORP. MONROE
Phone +1 203 261 3100
Fax. +1 203 268 4752
mmo@mikron.com

China Sales
MIKRON TOOL SHANGHAI
Phone +86 21 2076 5671
Fax. +86 21 2076 5562